

# JCB BH1916 | COMPACT BACKHOE



A Product  
of Hard Work

# FAST FACTS


- Heavy-duty construction is reliable and durable
- Centre mount design with full width stabiliser feet allows working on slopes
- Excellent digging power provides increased productivity
- Wide range of attachments available increases versatility
- Safety features, including non-slip floor and hand rail, give safe access and dismount



## JCB COMPACT BACKHOE | BH1916



The JCB BH1916 Compact Backhoe has been designed to compliment the JCB 323 & 327 Compact Tractors, offering added versatility and increased productivity. Fitment and removal of the backhoe takes less than five minutes via the tractor mounted, under chassis frame which provides a secure and reliable fixing point. A range of buckets are available, allowing a variety of tasks to be carried out.

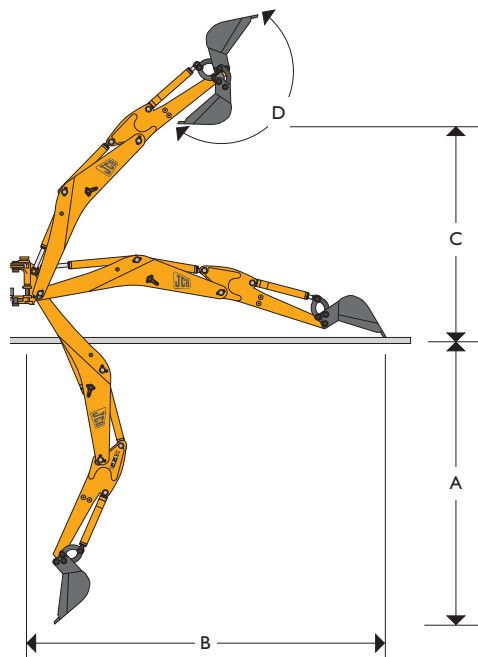

### DIMENSIONS

Machine model	BH1916	
A Maximum digging depth	mm (in)	1940 (76)
B Maximum reach	mm (in)	2680 (105)
C Loading height	mm (in)	1615 (64)
D Bucket rotation angle (SAE)		172°
Slew angle		180°
Stabiliser spread (down position)	mm (in)	1950 (77)
Stabiliser spread (up position)	mm (in)	1250 (49)
Angle of departure		21°
Digging force – Dipper arm	kN	7
Digging force – Bucket	kN	12.8
Approx. weight	kg (lb)	357 (787)
Hydraulic working pressure	bar (psi)	170 (2466)

(Dimensions may vary depending on tractor and tyre choice.)

### OPTIONAL EQUIPMENT

A range of buckets are available.



JCB Attachments Limited, Rugeley, Staffordshire WS15 2WA.  
Tel: 01889 572796. Fax: 01889 570043. Web: <http://www.jcb.com>

JCB cares for the environment.  
This paper has been produced  
without the use of elemental chlorine  
chemicals in the bleaching process.

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories.  
The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



9814/0198 9/06 Issue 1

A Product  
of Hard Work